


UV & TRIPLE IR FLAME (RADIANT ENERGY) DETECTOR

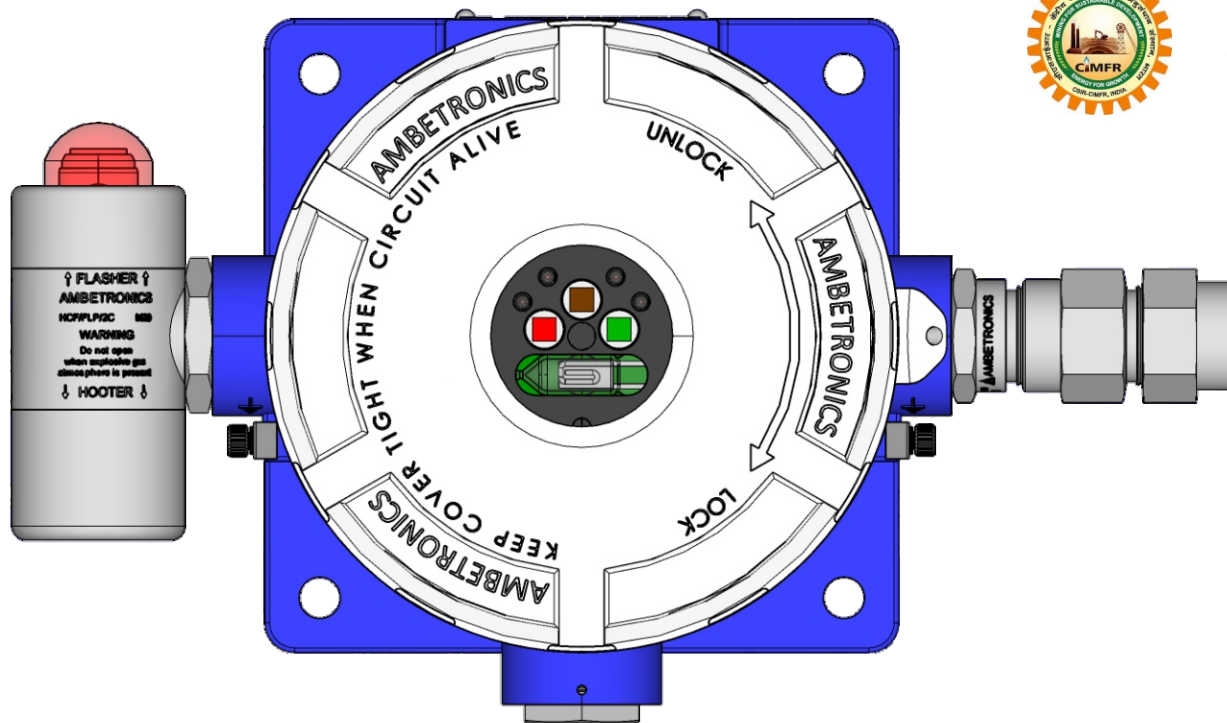

Features

- Detector detects Multi-Spectral Sensitivity of fire by using UV & IR sensors
- Clear Line of Sight visual range (upto specific distance)
- Triple Spectrum Design- For long distance detection & Excellent false alarm immunity
- Sensitivity Selection – To ensure no zone cross over detection.
- High sensitivity combined with fast response time to ensure rapid & accurate flame detection.
- Multiple output options for maximum flexibility and compatibility.
 - (3) Relays for FLAME DETECTION, AUXILIARY and FAULT
 - 0 - 20mA (Stepped) or 0 - 10V (Stepped)
 - Optional HART protocol for configuration setting
 - RS-485, MODBUS compatible
- User programmable via Bluetooth, HART or RS-485.
- Heat detector extension (optional)
- Date-time stamped event logging
- Built in self test (BIT)
- Mobile alert (LoRa/WiFi) (optional)
- Connectivity via IoT (optional)
- Test Lamp compatibility for safe Test

Approval & Compliance

Approval & Compliance for Flameproof :

IIC Approval :	CIMFR Test Report No. :	PESO Certificate No. :
Certified to Ex d IIC T6 Gb, IP66 & IP68 Standard Compliance : • IS/IEC 60079-0 : 2017 • IS/IEC 60079-1 : 2014 • IS/IEC 60529 : 2001	IN/CIMFR/TR20/3034 Dt.: 10/11/2020	P492376/1 Dt.: 13/01/2021
BIS LICENSE NUMBER : 7800046916		

* Applied for UL certification

Applications

- Battery Storage Rooms / Data Communication
- Clean Rooms: Semi-conductor, Pharmaceutical & Hospital Operating Rooms
- Paint Booth, Production line
- Onshore & Offshore Oil & Gas Installations & Pipelines
- Engine Test Cells / Rooms
- Indoor Chemical, Fuel & Solvent Storage
- Indoor Diesel Storage & Processing
- High Voltage Equipment / Power Plants
- Petrochemical / LNG/LPG Production
- Manufacturers & Automation Industries
- Laboratories
- Monitoring Of Machinery
- Refineries
- Chemical Plants
- Nuclear Power Sites
- Aircraft Hangers
- Waste Recycling

MUST FOR HUMAN AND INDUSTRIAL SAFETY

TECHNICAL SPECIFICATIONS

GENERAL

Parameter Setting	: Field configuration settings done by Bluetooth or MODBUS RTU Protocol.
Spectral Response	: UV Band - (185nm to 260 nm) Three IR Bands - (3000 nm to 5000 nm)
Detection Range	: • n-Heptane : 88ft (27m)
(At highest sensitivity	• Kerosene : 82ft (25m)
Setting for 1ft ² pan fire)	• Diesel Fuel : 82ft (25m)
	• Methanol : 66ft (20m)
	• Gasoline : 82ft (25m)

PERFORMANCE

Response Time	: Typically Less than 5 seconds (Depending on Flame Size & Sensitivity)
Field of View	: 100° Horizontal, 90° Vertical, 120° Diagonal cone vision
Adjustable Time Delay	: Upto 30 seconds
Adjustable Sensitivity	: Low, Medium and High
BIT	: Automatic and manual built in self check test
Performance Test	: Performance can be tested by using Test Lamp (FTU-3311-FLP)(Safe Test)

ELECTRICAL

Supply Voltage	: 18 to 36 VDC, typically 24VDC
Power Consumption	: Less than 3W

OUTPUT SIGNAL

4-20mA Current Output	: 250 to 600 ohms load driving capacity
or 0- 10V	: Fault : 1mA Normal : 4mA Fire detect : 20mA
L.E.D. Indication	: Blinking POWER LED (Green), FIRE DETECT LED (RED) & COMMUNICATION LED (Blue)
Relay	: Three SPDT relays 6A@ 30VDC & 250 VAC for Fail safe, Fire detection & Auxiliary output.
Event Logging	: Date-Time stamped Event Logging
Communication	: RS-485 communication port with MODBUS RTU protocol.
HART Protocol	: Use for configuration changes by using
(Proprietary optional)	AEPL Communicator
Connectivity (optional)	: Mobile connectivity and SMS alert via LoRa & IoT support

ENVIRONMENTAL

Operating Temperature	: -15°C to +50°C
Storage Temperature	: -20°C to +85°C
Humidity	: Less than 95% Non-Condensing

ACCESSORIES (OPTIONAL)

- RS-485 to USB OR RS-232 converter
- Hooter cum Flasher
- Protection Cover
- Heat Detector
- Air shield
- Magnetic Wand
- Test Lamp

FLAMEPROOF HOUSING


Degree of Protection Class	: IP-66 & IP-68
Housing Material	: Cast Aluminium LM6 alloy or Stainless Steel
Cable Entry	: Flameproof, IP66 Double Compression Cable Gland - M20 x 1.5 (P)
Wiring	: 16-26AWG (1.5mm ² - 0.14 mm ²)
Dimension (IIC Enclosure)	: 155mm (H) x 263mm (W) with Hooter cum Flasher & cable gland x 125 mm (D) 155mm (H) x 223 mm (W) with stopper plug & cable gland x 125 mm (D)
Dimension (JB-90 Enclosure)	: 128mm (H) x 200mm (W) with one cable gland & Stopping Plug x 97 mm (D) 128 mm (H) x 240mm (W) with Hooter Cum Flasher & one cable glands x 97mm (D)
Mounting	: Wall or Pipe Mounting
Weight	:
• IIC Enclosure	: Approx 2.53 Kg. (LM6), Approx 7 Kg. (SS316)
• JB-90 Enclosure	: Approx 1.25 Kg. (LM6), Approx 4.5 Kg. (SS316)
• Mounting stand for IIC Enclosure	: 1.6 kg. to 2 kg.

CIMFR & PESO APPROVALS & STANDARDS

Degree of Protection Class	: IP-66 & IP-68
<u>JB/FLP/IIC Enclosure</u>	:
• CIMFR CERTIFICATE NO.	: IN/CIMFR/TR20/3034 Dt. : 10/11/2020
• PESO CERTIFICATE NO.	: P492376/1 Dt. : 13/01/2021
<u>JB/90FLP/IIC Enclosure</u>	:
• CIMFR CERTIFICATE NO.	: IN/CIMFR/TR20/3007 Dt. : 22/10/2020
• PESO CERTIFICATE NO.	: P492376/2 Dt. :13/01/2021
<u>Hooter cum Flasher</u>	: HCF/FLP/2C
• CIMFR CERTIFICATE NO.	: IN/CIMFR/TR19/4378 Dt. : 13/12/2019
• PESO CERTIFICATE NO.	: P468728/3 Dt. :21/02/2020
<u>Cable Gland</u>	: Double Compression Cable Gland - Model No.: CG/FLP/2C M20 x 1.5 (P) ½" NPT & ¾" NPT
• CIMFR CERTIFICATE NO.	: CIMFR/TC/P/1313 Dt. : 19/09/2018
• PESO CERTIFICATE NO.	: P431645/2 Dt. :19/11/2019

<u>Stopping Plug</u>	: SP/FLP/2C - (M20 x 1.5P)
• CIMFR CERTIFICATE NO.	: CIMFR/TC/P/1314 Dt. : 19/09/2018
• PESO CERTIFICATE NO.	: P431645/3 Dt. :19/11/2019


UV & IR SPECTRUM

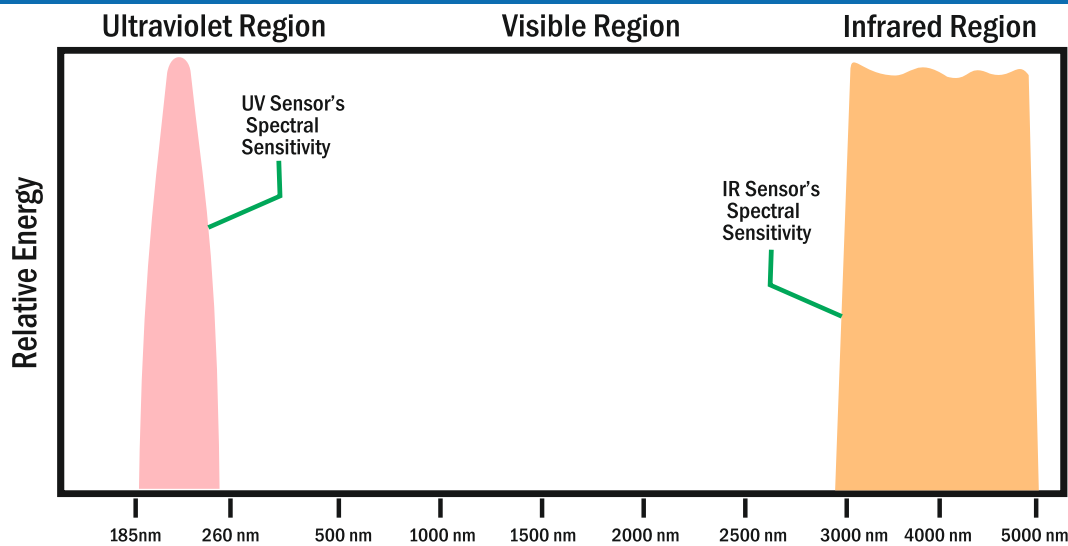


UV & IR Spectrum

FIELD OF VIEW


100° HORIZONTAL

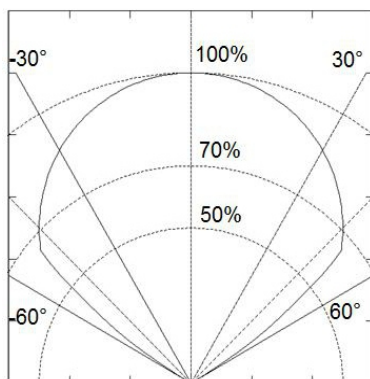

90° VERTICAL

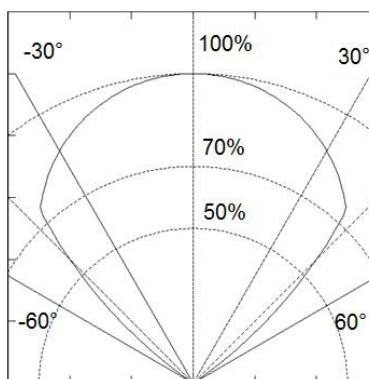

120° DIAGONAL

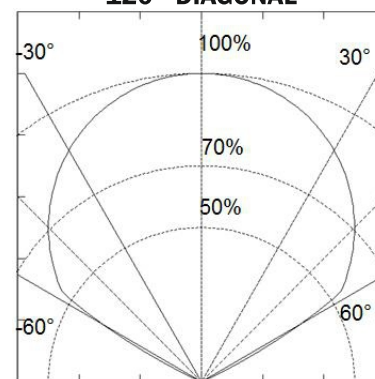

ORDERING INFORMATION

FLD-3311-FLP-UV & IR3	A	B	C	D	E	F	G	H
	A) Enclosure (FLP) 1) JB-FLP-IIC 2) JB - 90	B) Enclosure (FLP) 1) LM6 2) SS-316	C) Transmission Output 1) 4-20mA / 0-10V 2) 4-20mA with HART	D) Hooter cum Flasher 1) No 2) Yes	E) Heat Detector 1) No 2) Yes	F) Mobile Connectivity 1) No 2) Yes	G) Air Shield 1) No 2) Yes	H) Test Lamp FTU-33-(FLP)

*Before placing order please refer the above ordering information of contact below address for assistance.

Manufactured by :

AMBETRONICS ENGINEERS PVT. LTD.

17-B, Tarun Industrial Estate, Mogra Pada, New Nagardas Road, Andheri (E.) Mumbai - 400 069, India.

Mob. : +91-9320619646 • +91-9167418106 • +91-7208962297 • Tel.: +91-22-61673000/26

E-mail : project@ambetronics.com • manan@ambetronics.com • sales14@ambetronics.com

Website : www.ambetronics.com



Follow us on



www.ambetronics.com

Version : FLD-3311-FLP-R5-23-02-2021