
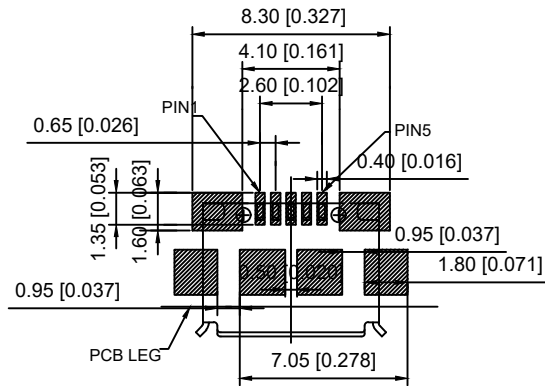
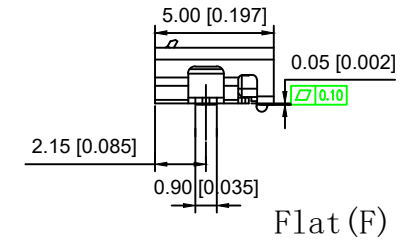


Scrolls (S)

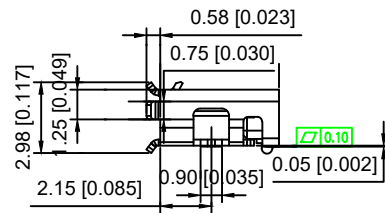

RECOMMENDED P.C.B. LAYOUT  
TOP VIEW (TOLRANCE: ±0.05)

Material  
Housing Material: LCP, UL94V-0, black  
Contact Terminal: Copper Alloy  
Metallic Shell: Sus  
Electrical  
Voltage Rating: 30 V AC  
Current Rating: Signal (Pins 2,3,4): 1.0A, Power (Pins 1,5): 1.8A  
Contact Resistance: 30mΩ Max  
Insulation resistance: 1000MΩ Min  
Dielectric withstanding voltage: 250V AC/Minute  
Mechanical  
Durability: 10,000 cycles  
Mating Force: 35N (3.57Kgf) Max  
Unmating Force: 8N (0.82Kgf) Min.

U253-05XX-4BH89-XXS  
1:AU 1U"  
6:AU 30U"  
T:TIN  
N:NICKEL  
S:Sus  
1:WITH 2:WITHOUT  
S:Scrolls F:Flat

						DSND		DATE		SCALE: N/A	MODEL TYPE: MICRO USB
ΔX						DWN		DATE		VIEW:	PART NO.:
Δx						CHKD		DATE		UNIT: mm/in	DWG NO.:
MARK	DESCRIPTION	DATE	REVISED	APPROVED		APPD		DATE		SIZE: A4	U253-05XX-4BH89-XXS
	REVISIONS										WEIGHT
					UNSPECIFIED TOLERANCES						SHEET
											REVISION
											1.0g
											1/1
											A0