
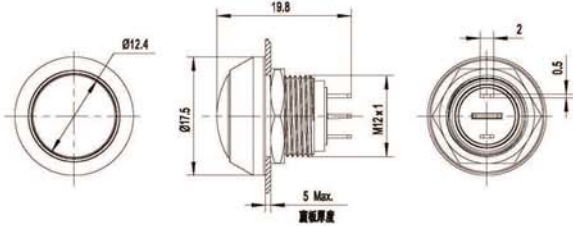

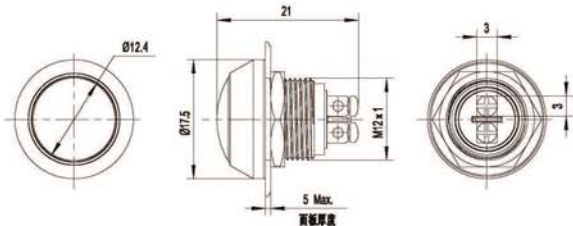

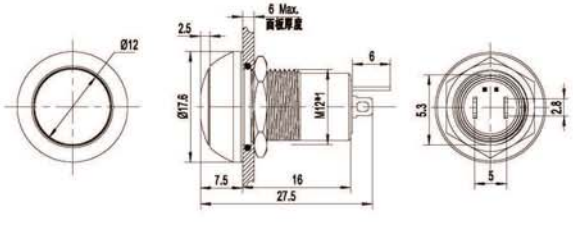

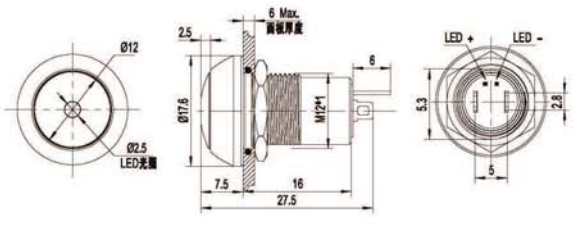


金屬按鈕開關系列 Metal Push Button Switch Series

| 產品外觀 | 技術參數 | 外形尺寸 |
|--|--|--|
|  <p>GQ-12BJ</p> | 安裝尺寸Diameter: $\Phi 12\text{mm}$ 開關額定值Switch Rating: 2A/36VDC 開關組合Contact Configuration: 1NO 操作類型Operation Type: 自復型Momentary 外殼材料 The Crust Material: 不銹鋼Stainless steel/ 銅鍍鎳Copper plating 防護等級IP Degree: IP67, IK08 |  |
|  <p>GQ-12B</p> | 安裝尺寸Diameter: $\Phi 12\text{mm}$ 開關額定值Switch Rating: 2A/36VDC 開關組合Contact Configuration: 1NO 操作類型Operation Type: 自復型Momentary 外殼材料 The Crust Material: 不銹鋼Stainless steel/ 銅鍍鎳Copper plating 防護等級IP Degree: IP67, IK08 |  |
|  <p>GQ-12BJ-L</p> | 安裝尺寸Diameter: $\Phi 12\text{mm}$ 開關額定值Switch Rating: 2A/36VDC 開關組合Contact Configuration: 1NO 操作類型Operation Type: 自鎖型Maintained 外殼材料 The Crust Material: 不銹鋼Stainless steel/ 銅鍍鎳Copper plating 防護等級IP Degree: IP67, IK08 |  |
|  <p>GQ-12BJ-DL-▲/N</p> | 安裝尺寸Diameter: $\Phi 12\text{mm}$ 頭部顏色Color: R G B Y O W 燈珠顏色Color: R G B Y O W 開關額定值Switch Rating: 2A/36VDC 開關組合Contact Configuration: 1NO 操作類型Operation Type: 自鎖型Maintained 帶燈方式Lamp type: 中心帶燈Dot Illuminated(LED) 外殼材料The Crust Material: 不銹鋼Stainless steel 銅鍍鎳Copper plating 防護等級IP Degree: IP67, IK08 |  |

| 產品規格 | Specification | GQ-12BJ | GQ-12B | GQ-12BJ-L | GQ-12BJ-DL-▲/N |
|----------|-----------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| 尾部配置 | Terminal Type | 接線插片Pin Terminal(2×0.8mm) | 接線柱Wiring terminal | 接線插片Pin Terminal(2×0.8mm) | 接線插片Pin Terminal(2×0.8mm) |
| 開關結構 | Switching | No.1 | No.1 | No.1 | No.1 |
| 開關規格 | Max. Switch Rating | 2A/36VDC | 2A/36VDC | 2A/36VDC | 2A/36VDC |
| 接觸電阻 | Contact Resistance | ≤50mΩ | ≤50mΩ | ≤50mΩ | ≤50mΩ |
| 絕緣電阻 | Insulation Resistance | ≥1000MΩ | ≥1000MΩ | ≥1000MΩ | ≥1000MΩ |
| 絕緣強度 | Dielectric Intensity | 2000VAC | 2000VAC | 2000VAC | 2000VAC |
| 環境溫度 | Operating Temp | -20°C~+55°C | -20°C~+55°C | -20°C~+55°C | -20°C~+55°C |
| 機械壽命 | Mechanical Life | 100萬次以上 1,000,000 cycles | 100萬次以上 1,000,000 cycles | 100萬次以上 1,000,000 cycles | 100萬次以上 1,000,000 cycles |
| 電氣壽命 | Electrical Life | 20萬次以上 200,000 cycles | 20萬次以上 200,000 cycles | 20萬次以上 200,000 cycles | 20萬次以上 200,000 cycles |
| 面板厚度 | Panel Thickness | 1-6mm | 1-6mm | 1-6mm | 1-6mm |
| 螺母扭矩 | Torque | 5-14Nm | 5-14Nm | 5-14Nm | 5-14Nm |
| 操作壓力 | Operation Pressure | 約5N About 5N | 約5N About 5N | 約5N About 5N | 約5N About 5N |
| 操作行程 | Operation Travel | 約2.5mm About 2.5mm | 約2.5mm About 2.5mm | 約2.5mm About 2.5mm | 約2.5mm About 2.5mm |
| 防護等級 | IP Degree | IP67, IK08 | IP67, IK08 | IP67, IK08 | IP67, IK08 |
| Material | 觸點 | 銀合金Silver alloy | 銀合金Silver alloy | 銀合金Silver alloy | 銀合金Silver alloy |
| | 按鍵 | 不銹鋼Stainless steel/銅鍍鎳Copper plating | 不銹鋼Stainless steel/銅鍍鎳Copper plating | 不銹鋼Stainless steel/銅鍍鎳Copper plating | 聚碳酸酯PC |
| | 外殼 | 不銹鋼Stainless steel/銅鍍鎳Copper plating | 不銹鋼Stainless steel/銅鍍鎳Copper plating | 不銹鋼Stainless steel/銅鍍鎳Copper plating | 不銹鋼Stainless steel/銅鍍鎳Copper plating |
| | 底座 | 聚碳酸酯PC | 聚碳酸酯PC | 聚碳酸酯PC | 聚碳酸酯PC |
| RohS | RohS | 可定制Made to order | 可定制Made to order | 可定制Made to order | 可定制Made to order |