

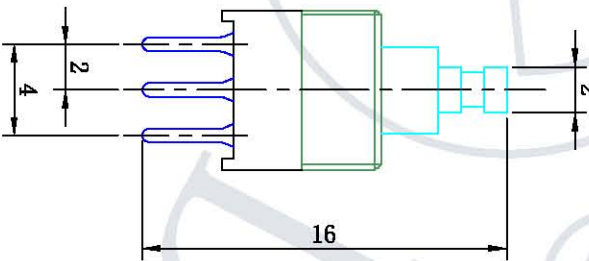
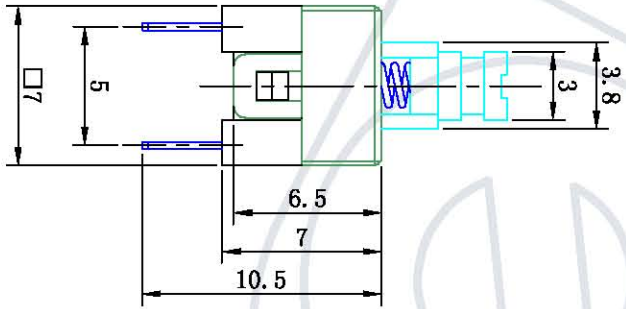


PCB安装面板  
PANEL CUT-OUT



电路图 Circuit



主要技术参数、性能  
The Main Technology Performance

项目 Item	参数 Parameter
操作力度 Operating Force	250±50gf
额定范围 Rating	DC30V 0.1A
相对湿度 Relative Humidity	(40° C) ≤95%
绝缘电阻 Insulation resistance	≥100MΩ
接触电阻 Contact resistance	≤30MΩ
介电强度(60Hz) Dielectric strength	AC250V (50Hz/1 minute)
操作温度 Operating Temperature	-25°C ~ +70°C
电寿命 Electrical Life	≥100,000 Cycles

弹簧 Spring	1	Spring steel wire 弹簧钢丝 0.6mm	
接触片 Contact	1	Brass Plated silver	
脚 terminal	6	Brass Plated silver	
底部 Bottom	1	PA66	
身体 housing	1	PA66	
头部 Button	1	PA66	
名称 NAME	数量 Q'TY	材料 MATERIAL	表面处理 FINISHING

版本	标示	更改描述

产品型号: KFC7Y7	产品料号:	标准:
产品系列 Push Button Switch	物料:	
图纸比例: 2.5:1	日期: 2014.3.11	日期: 2014.3.11
若有特殊标示, 公称依照以下要求: X=±0.5 .X=±0.30 .X=±0.15 <=±2%(单位: mm)		



乐清市戴尔电子有限公司  
YUEQING DAIRR ELECTRON CO., LTD

1 2 3 4 5 6 7 8 9 10

A

B

C

D

E

F

G

H