




Professional
to
create high-quality switches
专业缔造高品质开关产品

Micro Switch

微动开关

CQC CE RoHS

www.chinadaier.com

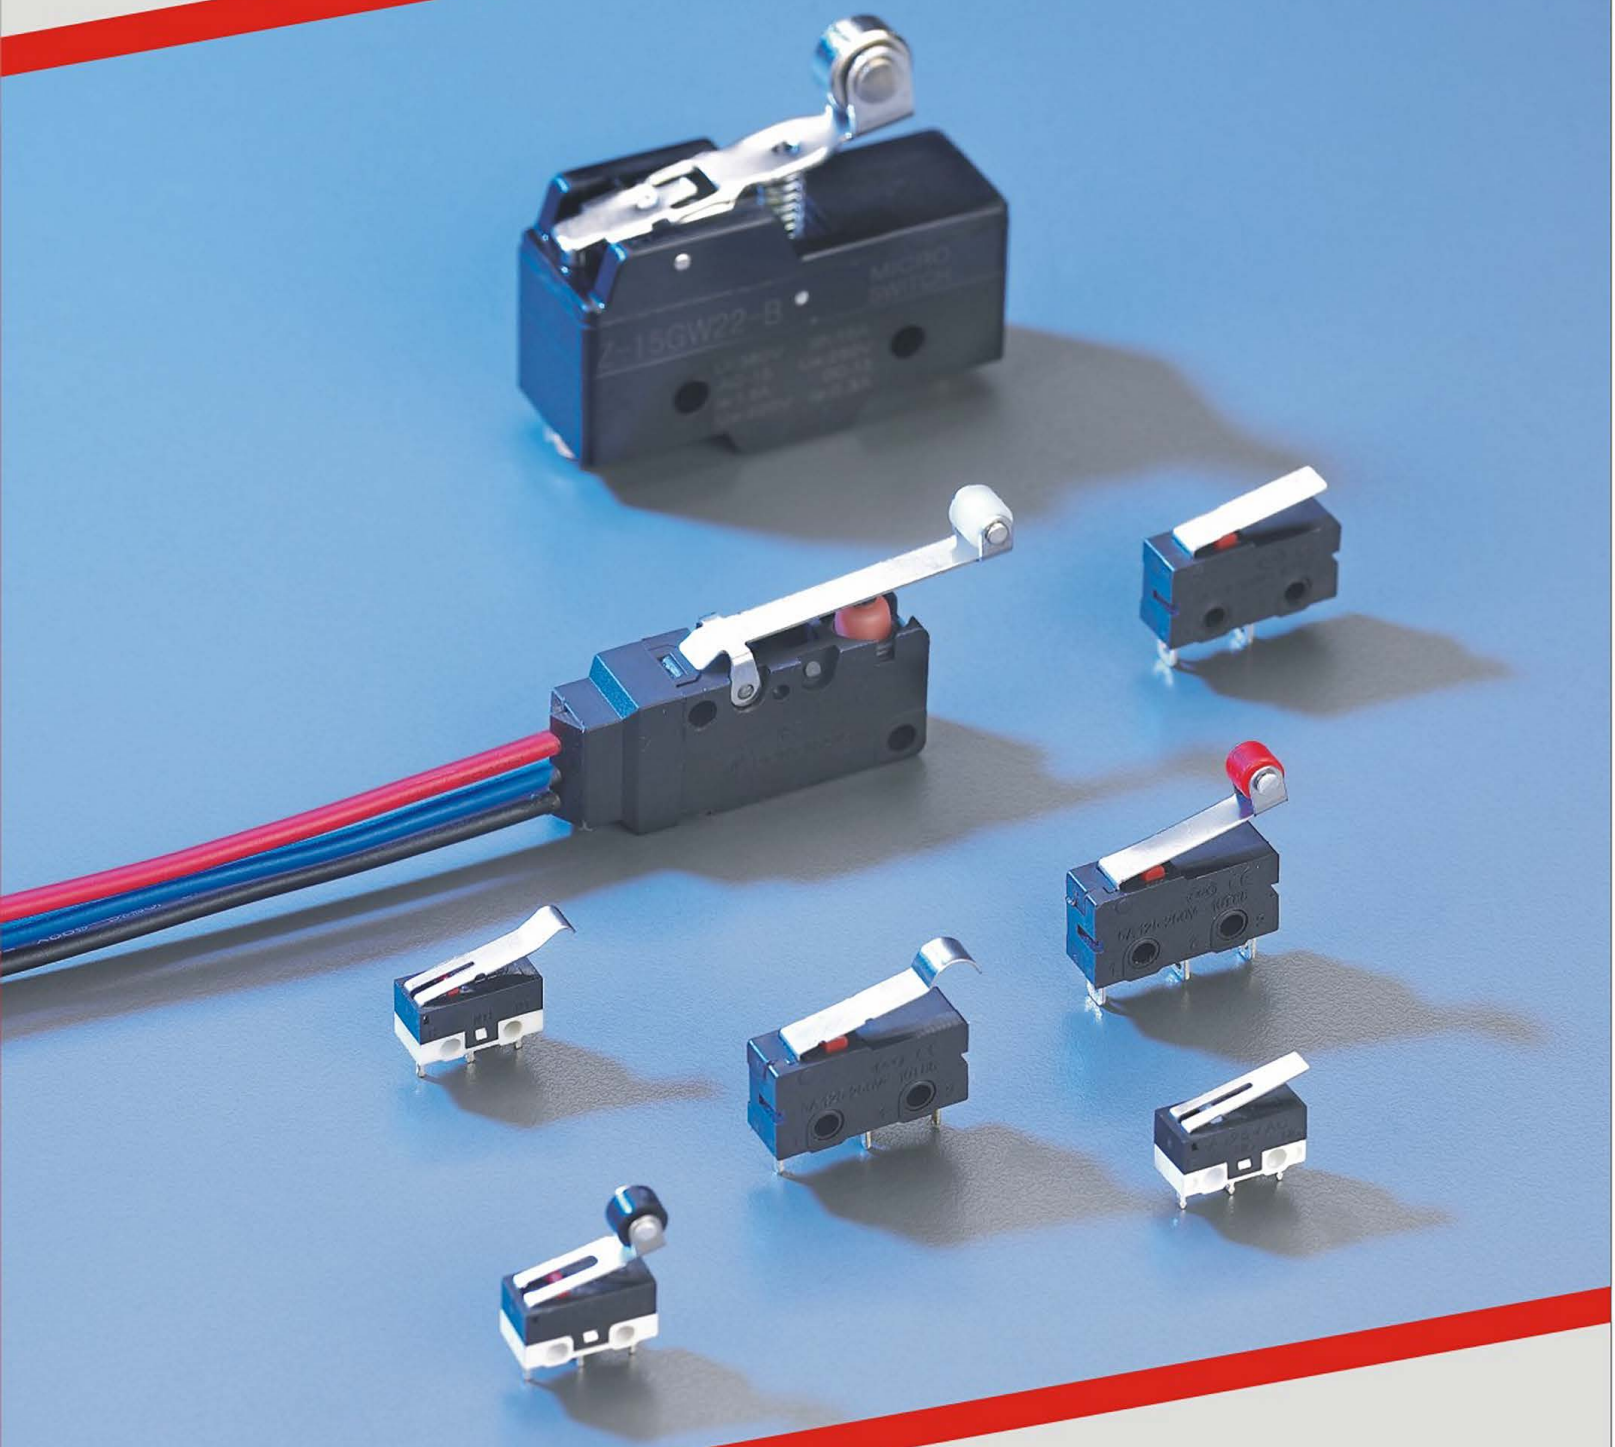


超小型微动开关 Sub-Miniature Micro Switch


技术特性 Specifications

1. 规格 Rating: 1A~3A 125/250VAC
2. 接触电阻 Contact Resistance: $\leq 50m\Omega$
3. 绝缘电阻 Insulation Resistance: $\geq 100M\Omega$ (500VDC)
4. 耐电压 Dielectric strength: 600VAC 1Minute
5. 操作温度 Operating Temperature: $-25^{\circ}C \sim +75^{\circ}C$
6. 环境湿度 Ambient Humidity Used: $<85\%RH$
6. 电气寿命 Electrical Life: $\geq 10,000$ Cycles
7. 机械寿命 Mechanical Life: $\geq 100,000$ Cycles


选型说明 How to order

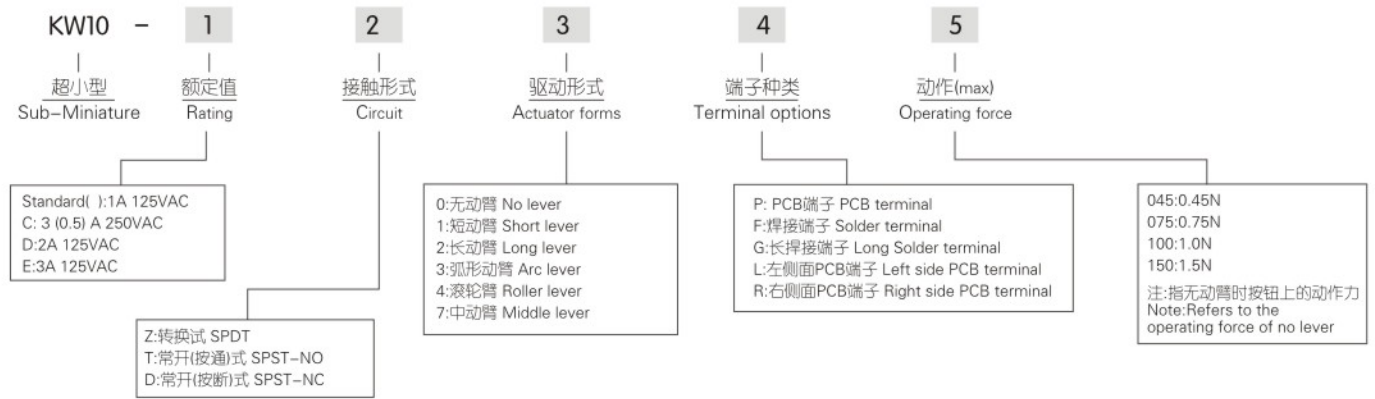


端子尺寸 Terminal dimensions

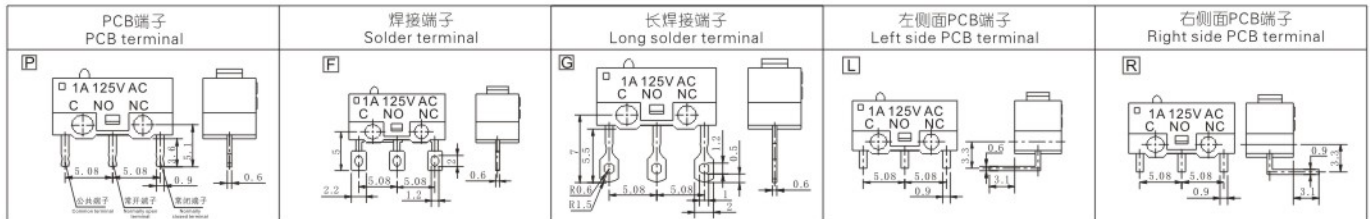

















安装孔尺寸 Mounting hole dimensions

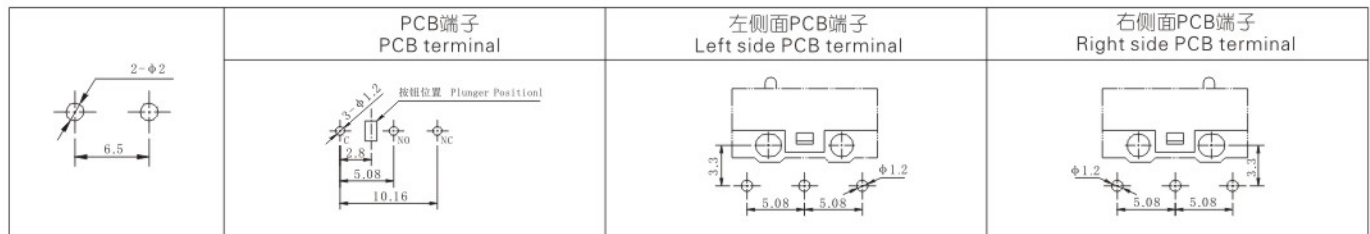

接触形式说明书 Circuit illustration

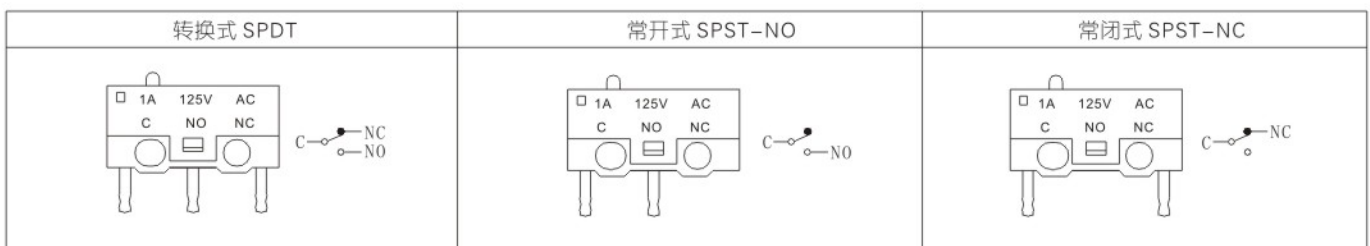

外形尺寸 Dimension

	<p>KW10-Z0P075 1A 125VAC KW10-CZ0P075 3A 250VAC KW10-DZ0P075 2A 125VAC KW10-EZ0P075 3A 125VAC</p>		
	<p>KW10-Z1P075 1A 125VAC KW10-CZ1P075 3A 250VAC KW10-DZ1P075 2A 125VAC KW10-EZ1P075 3A 125VAC</p>		
	<p>KW10-Z2P075 1A 125VAC KW10-CZ2P075 3A 250VAC KW10-DZ2P075 2A 125VAC KW10-EZ2P075 3A 125VAC</p>		
	<p>KW10-Z3P075 1A 125VAC KW10-CZ3P075 3A 250VAC KW10-DZ3P075 2A 125VAC KW10-EZ3P075 3A 125VAC</p>		
	<p>KW10-Z4P075 1A 125VAC KW10-CZ4P075 3A 250VAC KW10-DZ4P075 2A 125VAC KW10-EZ4P075 3A 125VAC</p>		
	<p>KW10-Z7P075 1A 125VAC KW10-CZ7P075 3A 250VAC KW10-DZ7P075 2A 125VAC KW10-EZ7P075 3A 125VAC</p>	