




Professional
to
create high-quality switches
专业缔造高品质开关产品

Micro Switch

微动开关

CQC CE RoHS

www.chinadaier.com

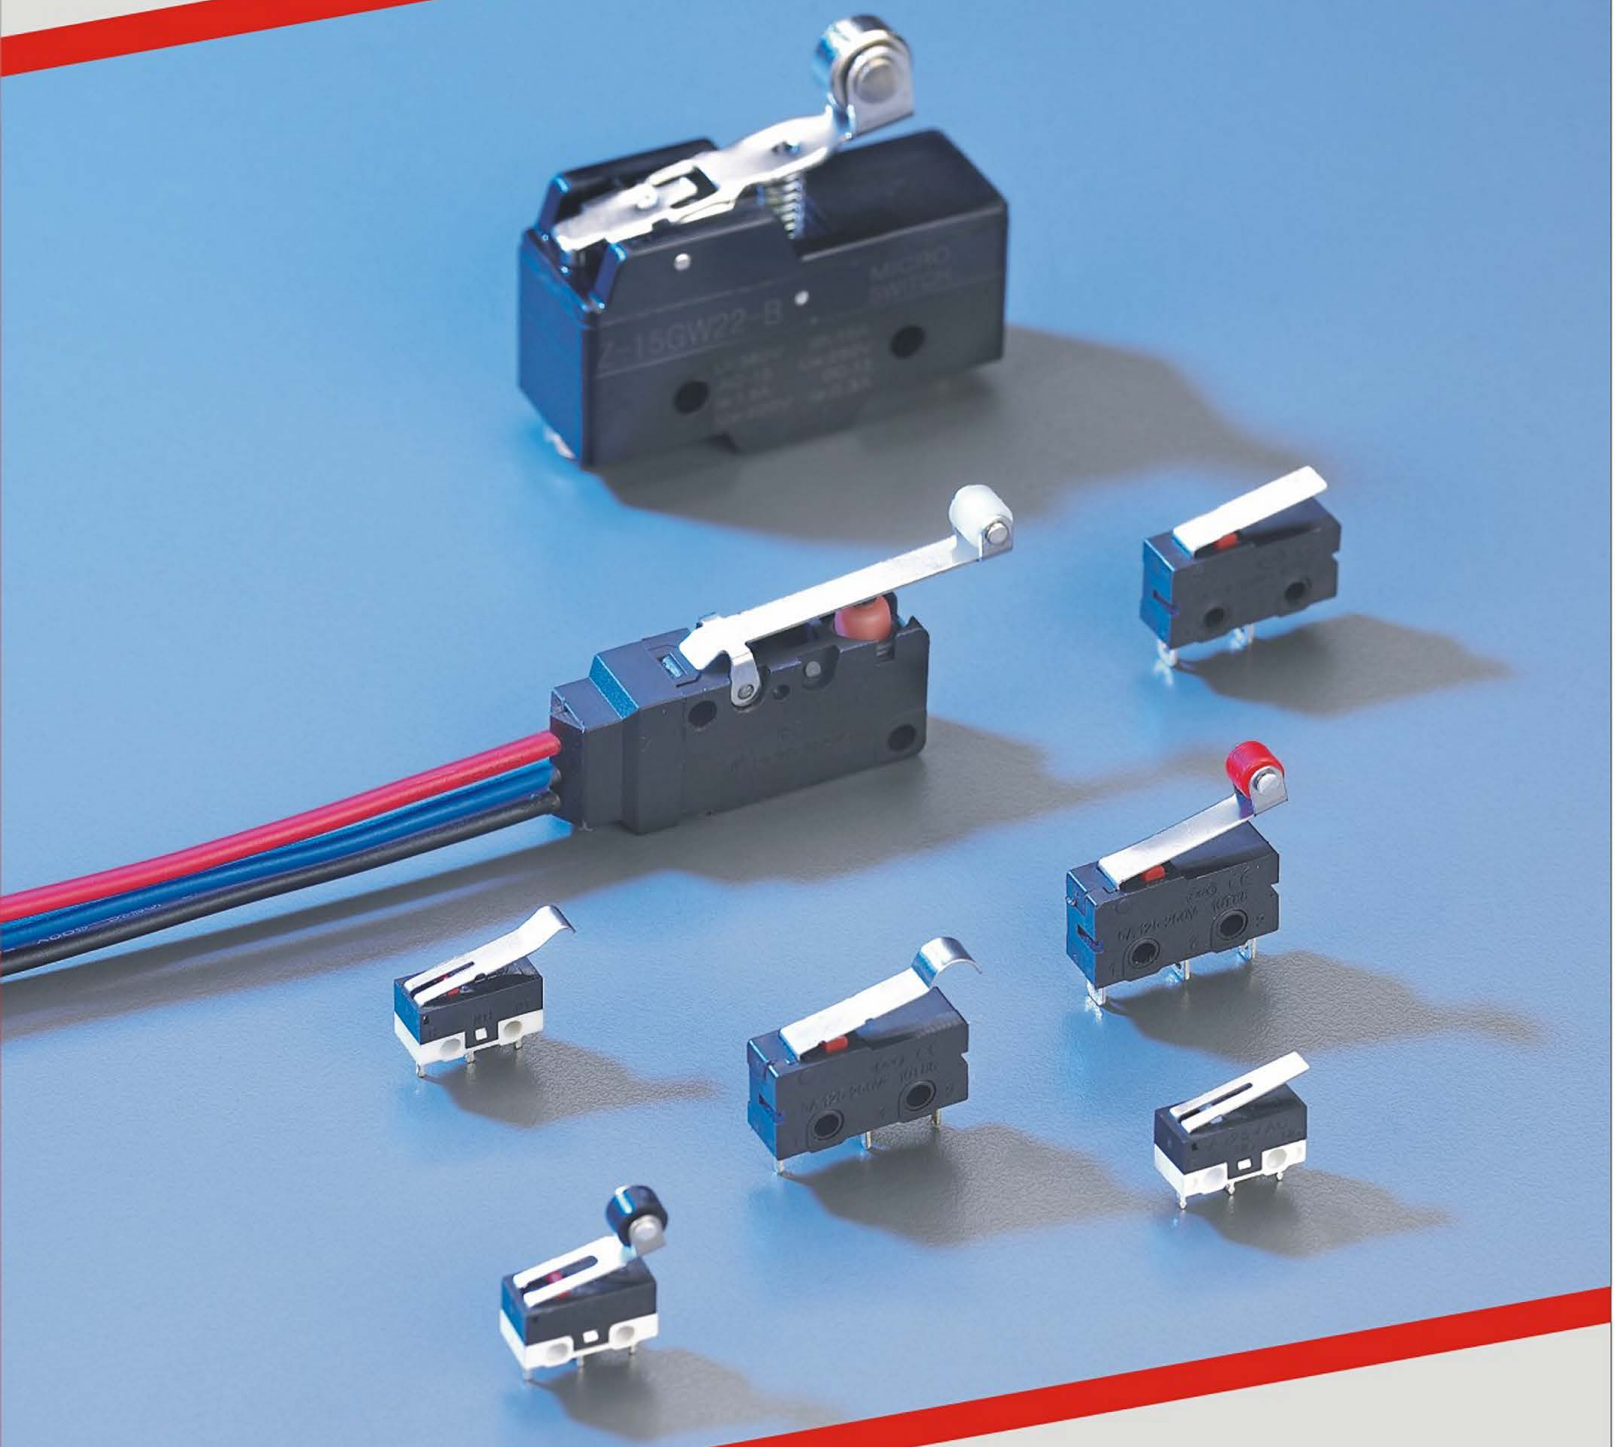


小型微动开关 Miniature Micro Switch


技术特性 Specifications

- | | |
|--|--|
| 1. 规格 Rating: 5A~10A 125/250VAC | 5. 操作温度 Operating Temperature: -25°C ~ +85°C |
| 2. 接触电阻 Contact Resistance: ≤50mΩ | 6. 环境湿度 Ambient Humidity Used: <85%RH |
| 3. 绝缘电阻 Insulation Resistance: ≥100MΩ (500VDC) | 6. 电气寿命 Electrical Life: ≥10,000 Cycles |
| 4. 耐电压 Dielectric strength: 1000VAC 1Minute | 7. 机械寿命 Mechanical Life: ≥100,000 Cycles |


选型说明 How to order

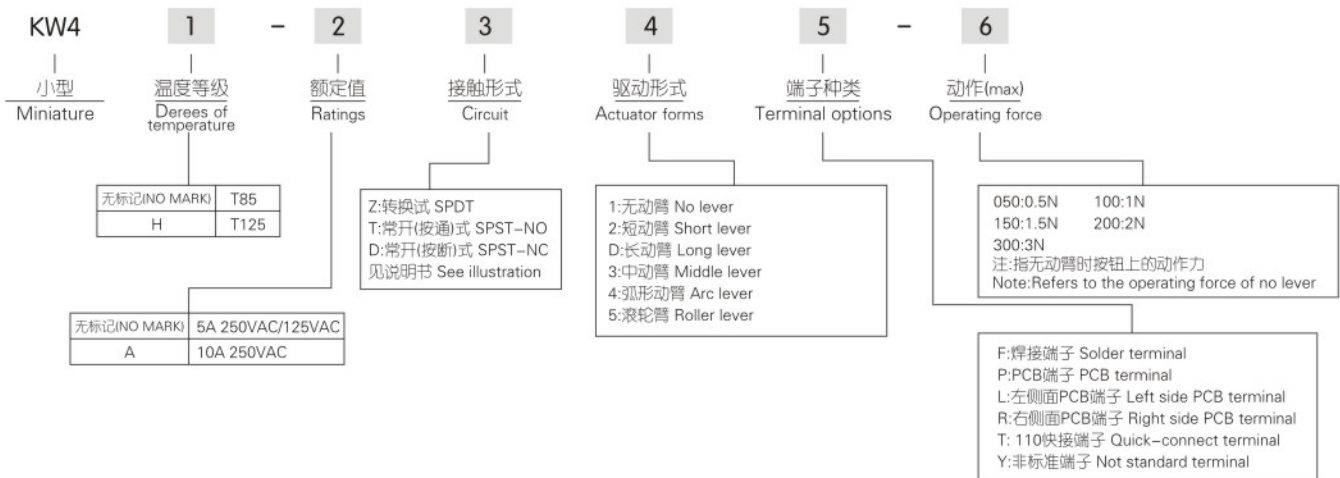


接触形式说明书 Circuit illustration

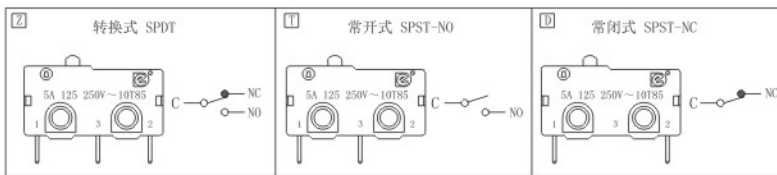

接线端子尺寸 Terminal dimensions

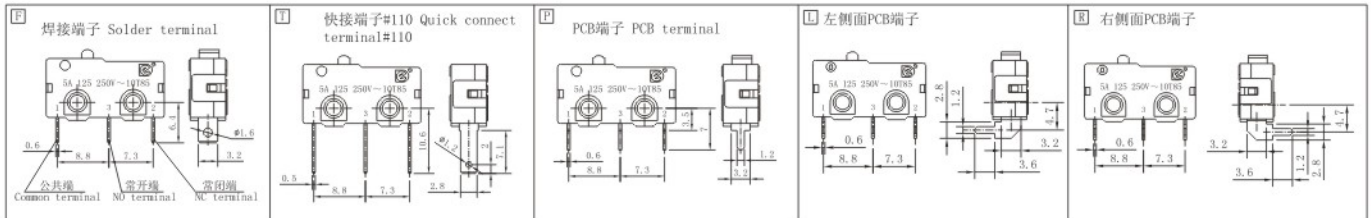


安装孔尺寸 Mounting hole dimensions

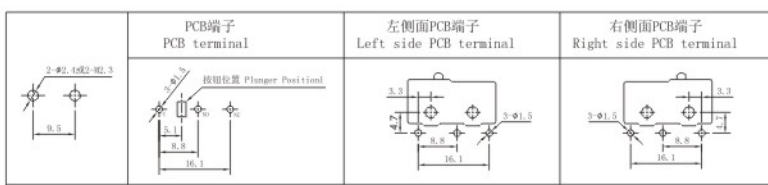


外形尺寸 Dimension





KW4-Z1F100
KW4-Z1F150
KW4-Z1F200

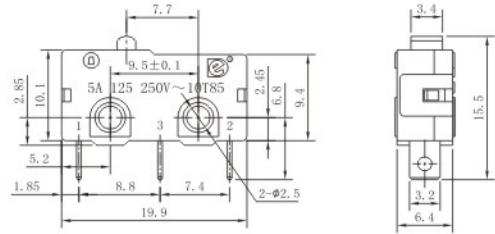


KW4-Z2F100
KW4-Z2F150
KW4-Z2F200

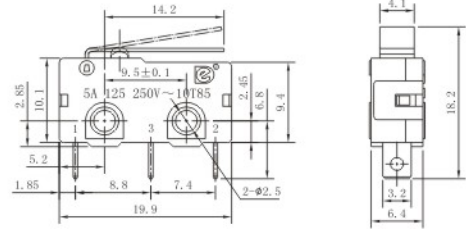


KW4-Z3F100
KW4-Z3F150
KW4-Z3F200

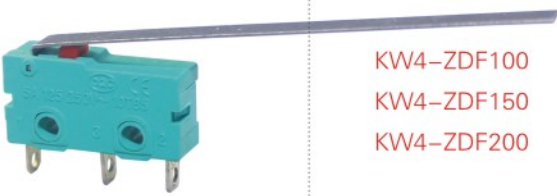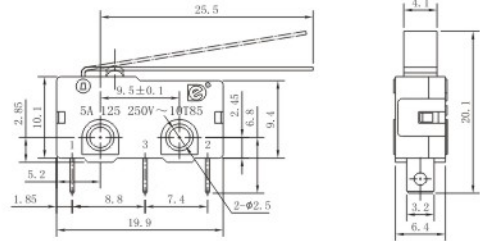

KW4-ZDF100
KW4-ZDF150
KW4-ZDF200

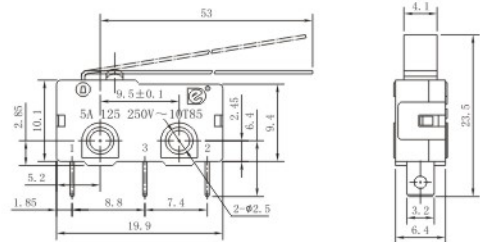

KW4-Z4F100
KW4-Z4F150
KW4-Z4F200

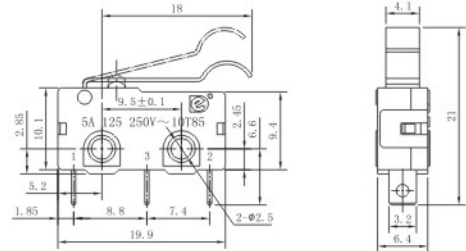

KW4-Z5F100
KW4-Z5F150
KW4-Z5F200

