


TF30A-A

Micro Diaphragm Pump

TF30A-A




Typical Applications

- Inkjet printer
- Fireplace
- Water purifier
- Analytical instruments
- Semi-conductors
- Medical equipment
- Lab equipment
- Food & beverage industry
- Cleaning industry

Features

- Self priming function is available
- Dry running is acceptable
- Food grade type can be customized
- Excellent reliability
- Maintenance free

Structure

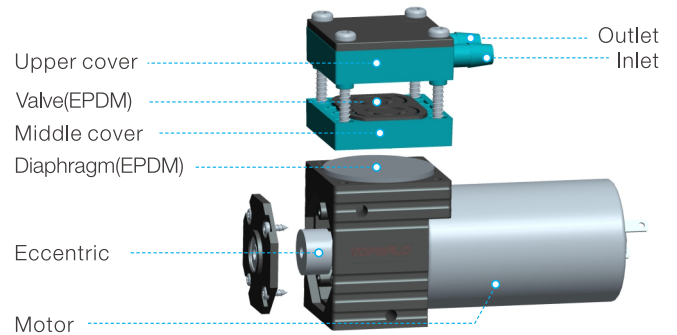


Specification

Model	Liquid Pump (Item Number)	Vacuum Pump (Item Number)	Rated Volatage (VDC)	No Load Current (A)	Max Vacuum (kPa)	Max Head (M)	Max Flow (L/min)	Motor Type	Lifetime (Hours)
TF30A-A	TF30A-A12-W1004	TF30A-A12-V7004	6/12/24	0.4/0.24/0.15	-70	10	water :0.4 gas:4	Brush Motor	3,000

Application Conditions:

- Medium temperature: 5°C~60°C
- Ambient temperature: -20°C~60°C

Curve

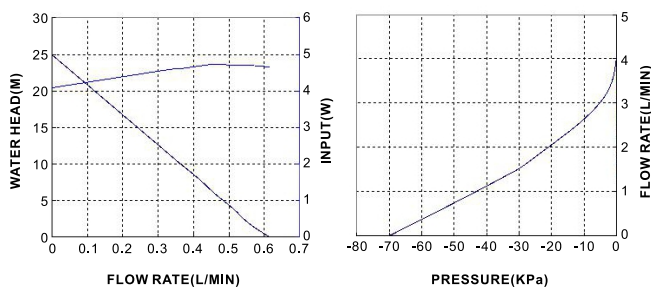

Dimension (mm)

