

产品规格书 SPECIFICATIONS

订购信息/产品编号 Ordering information/ Product numbers

DH-24 waterproof connectors 防水连接器

规格 Specifications

适用于数据信号
Is applicable to data-signal

连接方式: 1/4 快速卡口连接
防护等级: IP65/IP67
线径范围: ϕ 5.5mm - ϕ 7mm
耐久次数: \geq 500次
工作温度: -40° ~ 80°


Connecting mode: 1/4 bayonet connect
Protection level: IP65/IP67
Line diameter scope: ϕ 5.5mm - ϕ 7mm
Durability: \geq 500 mating/unmating Cycle
Temperature rating: -40° ~ 80°



DH-24-F00SX-S01

DH-24-F00PE-P01


Connection schemes

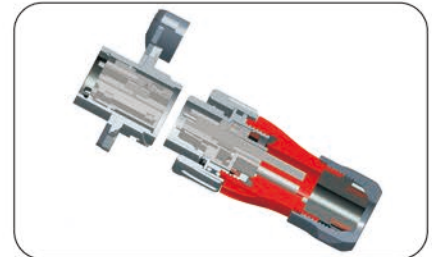

材料 Material

1. 外壳、绝缘部件: 高性能工程塑料
2. 防水圈: 硅胶
1. Shell & insulated parts: High performance engineer plastic
2. Sealing: Silica gel

外型尺寸图 Dimensions figure

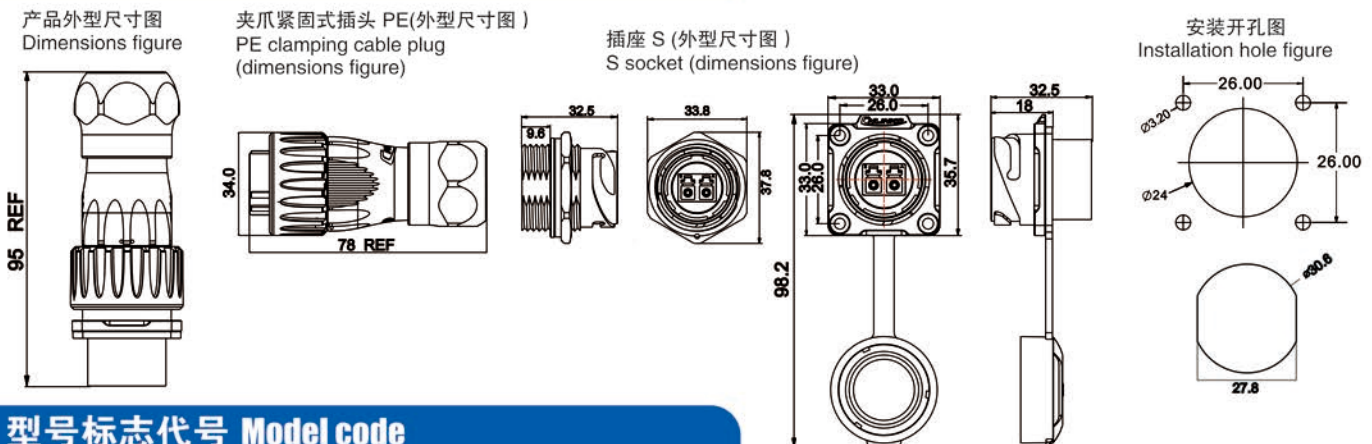

型号标志代号 Model code

DH-24-C03PE-01-001

- 产品型号: A~Z (AA~ZZ)
Product Type: A~Z (AA~ZZ)
- 插座与面板配合直径
Diameter of Socket and cover board matched
- 接插件种类: 单件 C= 插针 J= 插孔
Contact Type: CJ= Male Plug to female socket
- 芯数: 02~XX 不定上限
Core quantity: 02~XX
- 商业代码
Commercial Code
- 流水号
Follow No.
- 外壳结构型式: G=带盖板 E=夹爪紧固式 H=固定电缆式
R=其它 X=座子 不代表任何意义, 补料号位数
Shell structure form: G=with cover gasket E=clamping cable H=fixed cable R=others X=socket
- 连接器种类: P=插头 S=插座
Connector part: P=plug S=socket